




Artisan is a Chinese factory with 28 years 'experience, specializing in the development, manufacture and sale of outdoor supplies and related materials.




We are the vice-chairman unit of the Insulation Material Branch of China Electrical Appliance Industry Association and vice-chairman unit of China, Composite Material Industry Association. We are one of the drafting units of the national standards for composite materials and insulation materials in China.

Depending on a high-quality R&D team consisting mainly of Ph.D. and M.A., our products meet many national product standards, such as DIN of Germany, NEMA of the United States, JIS of Japan, and some of them even meet MIL-I standards of the U.S. military. All product meet the requirment of RoHS/CE/SGS/ISO standard.We have exported to more than 50 countries and regions and established long-term and stable cooperative relations with many home and abroad well known companies.

Professionalism, Preciseness, Patience, Focus, Dedication make us can be ARTISAN

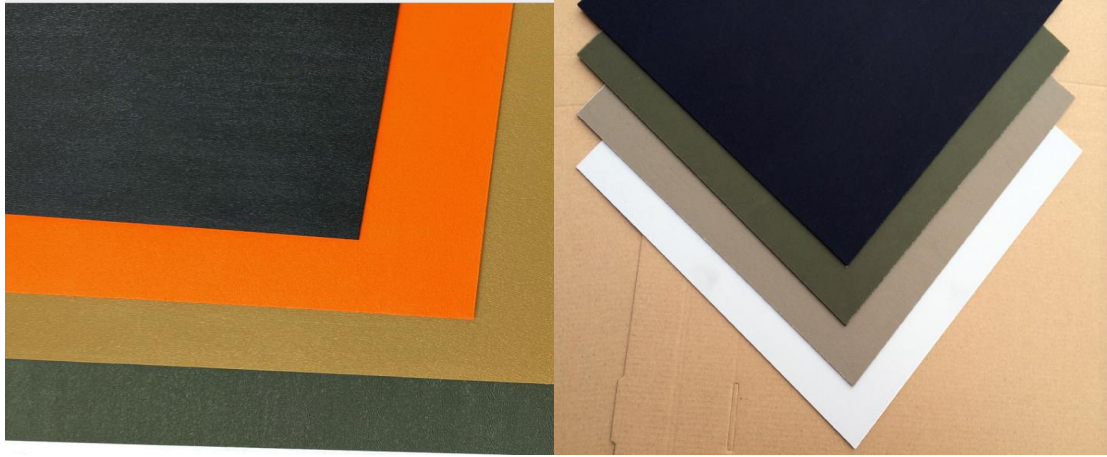Kydex sheet



Color	Standard color Black	Standard color Olive green	Standard color Desert
			
Standard size	1220×2440mm, can be cut to any size you want		
Thick	1.5mm or 2.0mm,or customized		
Moq			

Kydex



Eyelets



We have two sizes of eyelets, the two sizes are all suitable for Kydex with thickness from 1.5mm to 2mm, Material: H62 brass, Surface: Electroplated with gun color.

Eyelets Size 1

The diameter of the outer ring: **8.5mm**
The outer diameter: **6.5mm**(the diameter of kydex hole) **6.6mm drill bit will be need.**
Eyelet hole diameter: **6mm**
Eyelet total length: **7mm**

Drill bit 6.6mm



Material: Stainless steel
Diameter: 6.6mm
Hardness: 18 to 25 HCR

Install tool for Eyelets



Material: Stainless steel
Bar diameter: 9 mm ,bar length: 95 mm
Base diameter: 23 mm, base height: 20mm

Eyelets Size 2

The diameter of the outer ring: **8mm**
The outer diameter: **5mm**(the diameter of kydex hole) **5.1mm drill bit will be need.**
Eyelet hole diameter: **4.5mm**
Eyelet total length: **7.5mm**

Drill bit 5.1mm



Material: Stainless steel
Diameter: 5.1mm
Hardness: 18 to 25 HCR

Install tool for Eyelets



Material: Stainless steel
Bar diameter: 9 mm, bar length: 95 mm
Base diameter: 23 mm, base height: 20mm

Acrylic plate for Knife handle



Standard sheet size :1020*610mm

Thick:6mm to 50mm

Vulcanized Fiber



1.Color:black, red, white, gray and green


2.Thickness between 0.5mm to 1.5mm is in the form of roll

Roll width from 760mm to 860mm, length can be customized

3.Thickness between 2.0mm to 3.0mm is in the form of sheet

Sheet size is 1000*1200mm

Damascus blade

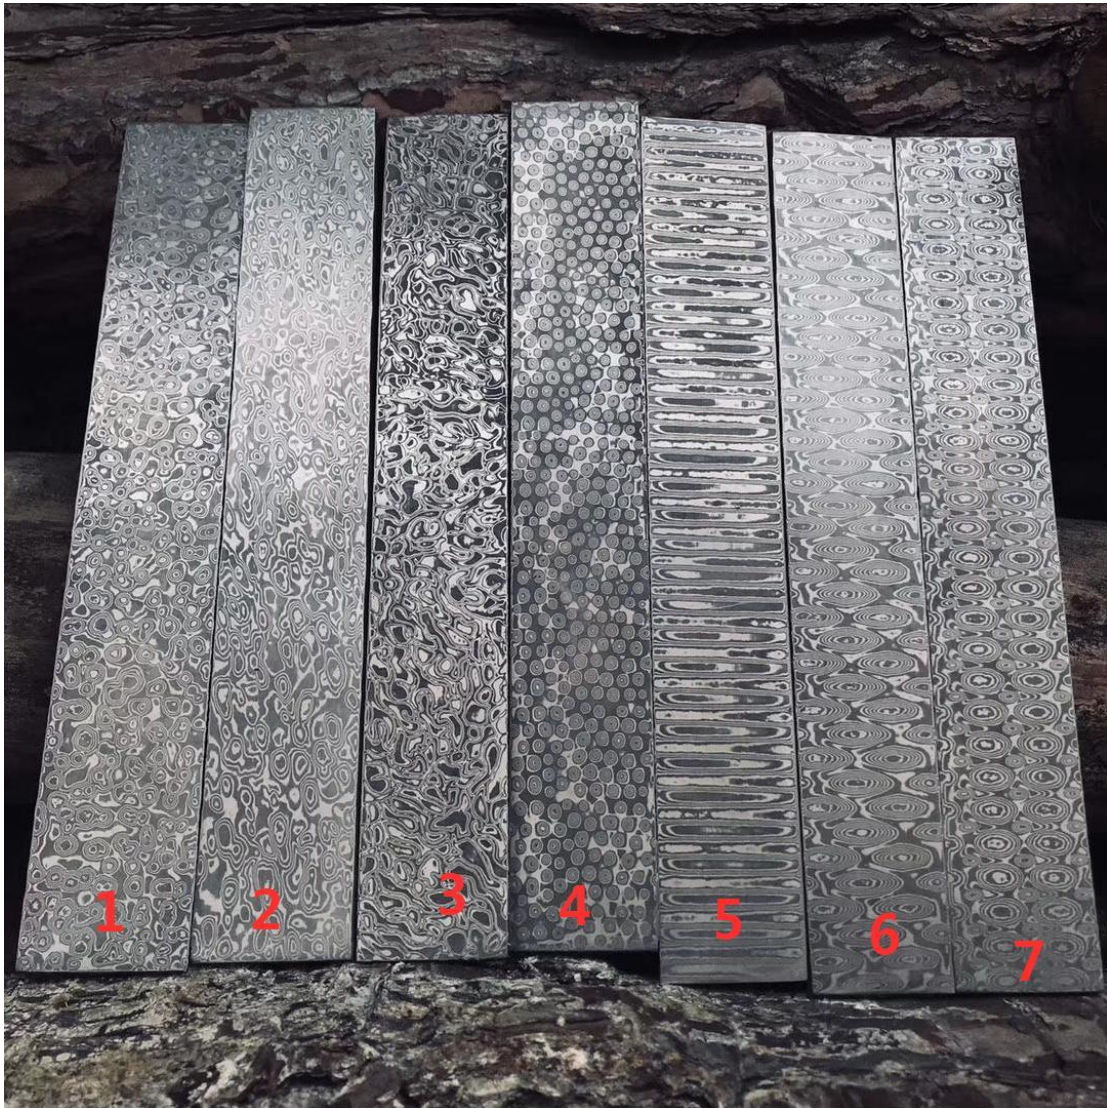

Pattern	Material	Material
No.1 to No.7	814=8cr14mov Hardness:58 to 60	vg10=10cr15comov Hardness:60 to 61
	1pc 350×50×3mm=0.45kg 1pc 500×50×3mm=0.6kg	

Screw #1/For 4mm handle hole use

416 stainless steel material,die stamping production



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Nut diameter (mm)	Nut thickness (mm)	Thread	
1	8.6	6	4	5.8	1.3	M3	
2	9.1	6.5	4	5.8	1.3	M3	
3	9.6	7	4	5.8	1.3	M3	
4	10.1	7.5	4	5.8	1.3	M3	
5	10.6	8	4	5.8	1.3	M3	
6	11.1	8.5	4	5.8	1.3	M3	
7	11.6	9	4	5.8	1.3	M3	
8	12.1	9.5	4	5.8	1.3	M3	
9	12.6	10	4	5.8	1.3	M3	
10	13.6	11	4	5.8	1.3	M3	
11	17.6	15	4	5.8	1.3	M3	
12	10.1	7	4	6.8	1.55	M3	
13	11.1	8	4	6.8	1.55	M3	
14	12.1	9	4	6.8	1.55	M3	
15	13.1	10	4	6.8	1.55	M3	
16	15.1	12	4	6.8	1.55	M3	
17	18.6	15.5	4	6.8	1.55	M3	
18	19.1	16	4	6.8	1.55	M3	
19	14	10.5	4	7.5	1.75	M3	
20	11.1	7.5	4	7.8	1.8	M3	
21	12.6	9	4	7.8	1.8	M3	

MOQ:1pcs for each size

Screw #2/ /For 5mm handle hole use



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	17.6	14	5	7.8	1.8	M3.5	
2	19.6	16	5	7.8	1.8	M3.5	
3	20.6	17	5	7.8	1.8	M3.5	
4	23.6	20	5	7.8	1.8	M3.5	
6	15.6	12	5	7.8	1.8	M3.5	
7	28.6	25	5	7.8	1.8	M3.5	
8	33.6	30	5	7.8	1.8	M3.5	
9	38.6	35	5	7.8	1.8	M3.5	
10	43.6	40	5	7.8	1.8	M3.5	

MOQ:1pcs for each size

Screw #3/For 6mm handle hole use




No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	17.6	14	6	7.8	1.8	M3.5	
2	19.6	16	6	7.8	1.8	M3.5	
3	20.6	17	6	7.8	1.8	M3.5	
4	23.6	20	6	7.8	1.8	M3.5	
6	15.6	12	6	7.8	1.8	M3.5	
7	28.6	25	6	7.8	1.8	M3.5	
8	33.6	30	6	7.8	1.8	M3.5	
9	38.6	35	6	7.8	1.8	M3.5	
10	43.6	40	6	7.8	1.8	M3.5	

MOQ:1pcs for each size

Screw #4 /For 5mm handle hole use

416 stainless steel+brass with "Automatic colt pistol mark"

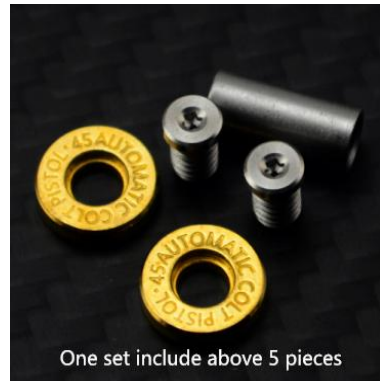


No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	18	14	5	10	2	M4	
2	20	16	5	10	2	M4	
3	21	17	5	10	2	M4	
4	24	20	5	10	2	M4	
5	13	9	5	10	0.5	M4	
6	16	12	5	10	2	M4	
7	29	25	5	10	0.5	M4	
8	34	30	5	10	0.5	M4	
9	39	35	5	10	0.5	M4	
10	44	40	5	10	0.5	M4	

MOQ:1pcs for each size

Screw #5 /For 6mm handle hole use

416 stainless steel+brass with "Automatic colt pistol mark"

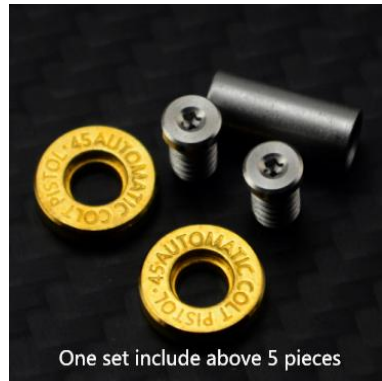

No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	18	14	6	10	2	M4	
2	20	16	6	10	0.5	M4	
3	21	17	6	10	2	M4	
4	24	20	6	10	0.5	M4	
5	13	9	6	10	2	M4	
6	16	12	6	10	2	M4	
7	29	25	6	10	0.5	M4	
8	34	30	6	10	0.5	M4	
9	39	35	6	10	0.5	M4	
10	44	40	6	10	0.5	M4	

MOQ:1pcs for each size

Screw #6 For 5mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	17	14	5	9	1.5	M4	
2	19	16	5	9	1.5	M4	
3	20	17	5	9	1.5	M4	
4	23	20	5	9	1.5	M4	
6	15	12	5	9	1.5	M4	
7	28	25	5	9	1.5	M4	
8	33	30	5	9	1.5	M4	
9	38	35	5	9	1.5	M4	
10	43	40	5	9	1.5	M4	

MOQ:1pcs for each size

Screw #7 For 6mm handle hole use

416 stainless steel




No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	17	14	6	9	1.5	M4	
2	19	16	6	9	1.5	M4	
3	20	17	6	9	1.5	M4	
4	23	20	6	9	1.5	M4	
6	15	12	6	9	1.5	M4	
7	28	25	6	9	1.5	M4	
8	33	30	6	9	1.5	M4	
9	38	35	6	9	1.5	M4	
10	43	40	6	9	1.5	M4	

MOQ:1pcs for each size

Screw #8 For 5mm handle hole use

416 stainless steel,Electroplated blue

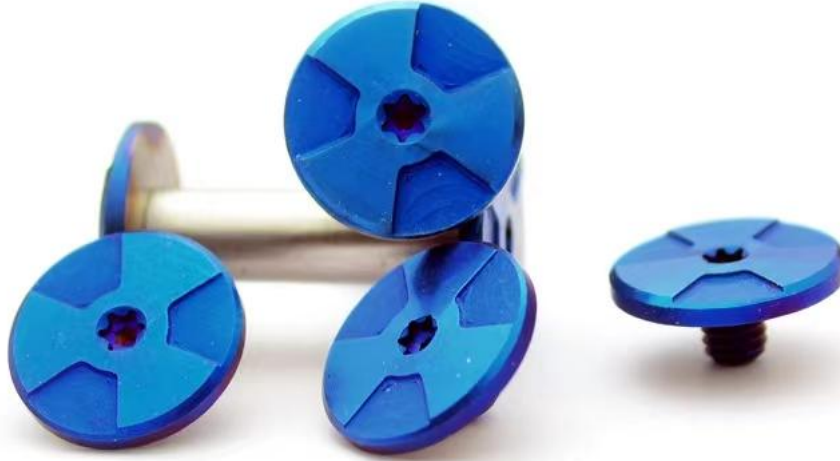

No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	17	14	5	12	1.5	M3.5	
2	19	16	5	12	1.5	M3.5	
3	20	17	5	12	1.5	M3.5	
4	23	20	5	12	1.5	M3.5	
5	12	9	5	12	1.5	M3.5	
6	15	12	5	12	1.5	M3.5	
7	28	25	5	12	1.5	M3.5	
8	33	30	5	12	1.5	M3.5	
9	38	35	5	12	1.5	M3.5	
10	43	40	5	12	1.5	M3.5	

MOQ:1pcs for each size

Screw #9 For 6mm handle hole use

416 stainless steel, Electroplated blue



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	17	14	6	12	1.5	M3.5	
2	19	16	6	12	1.5	M3.5	
3	20	17	6	12	1.5	M3.5	
4	23	20	6	12	1.5	M3.5	
5	12	9	6	12	1.5	M3.5	
6	15	12	6	12	1.5	M3.5	
7	28	25	6	12	1.5	M3.5	
8	33	30	6	12	1.5	M3.5	
9	38	35	6	12	1.5	M3.5	
10	43	40	6	12	1.5	M3.5	

MOQ:1pcs for each size

Screw #10 For 5mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	19	14	5	8	2.5	M4	
2	21	16	5	8	2.5	M4	
3	22	17	5	8	2.5	M4	
4	25	20	5	8	2.5	M4	
5	14	9	5	8	2.5	M4	
6	17	12	5	8	2.5	M4	
7	30	25	5	8	2.5	M4	
8	35	30	5	8	2.5	M4	
9	40	35	5	8	2.5	M4	
10	45	40	5	8	2.5	M4	

MOQ:1pcs for each size

Screw #11 For 6mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	19	14	6	8	2.5	M4	
2	21	16	6	8	2.5	M4	
3	22	17	6	8	2.5	M4	
4	25	20	6	8	2.5	M4	
5	14	9	6	8	2.5	M4	
6	17	12	6	8	2.5	M4	
7	30	25	6	8	2.5	M4	
8	35	30	6	8	2.5	M4	
9	40	35	6	8	2.5	M4	
10	45	40	6	8	2.5	M4	

MOQ:1pcs for each size

Screw #12 For 5mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	19	14	5	10	1.3	M4	
2	21	16	5	10	1.3	M4	
3	22	17	5	10	1.3	M4	
4	25	20	5	10	1.3	M4	
5	14	9	5	10	1.3	M4	
6	17	12	5	10	1.3	M4	
7	30	25	5	10	1.3	M4	
8	35	30	5	10	1.3	M4	
9	40	35	5	10	1.3	M4	
10	45	40	5	10	1.3	M4	

MOQ:1pcs for each size

Screw #13 For 6mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	19	14	6	10	1.3	M4	
2	21	16	6	10	1.3	M4	
3	22	17	6	10	1.3	M4	
4	25	20	6	10	1.3	M4	
5	14	9	6	10	1.3	M4	
6	17	12	6	10	1.3	M4	
7	30	25	6	10	1.3	M4	
8	35	30	6	10	1.3	M4	
9	40	35	6	10	1.3	M4	
10	45	40	6	10	1.3	M4	

MOQ:1pcs for each size

Screw #14 For 5mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	19	14	5	12	2.5	M4	
2	21	16	5	12	2.5	M4	
3	22	17	5	12	2.5	M4	
4	25	20	5	12	2.5	M4	
5	14	9	5	12	2.5	M4	
6	17	12	5	12	2.5	M4	
7	30	25	5	12	2.5	M4	
8	35	30	5	12	2.5	M4	
9	40	35	5	12	2.5	M4	
10	45	40	5	12	2.5	M4	

MOQ:1pcs for each size

Screw #15 For 6mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	19	14	6	12	2.5	M4	
2	21	16	6	12	2.5	M4	
3	22	17	6	12	2.5	M4	
4	25	20	6	12	2.5	M4	
5	14	9	6	12	2.5	M4	
6	17	12	6	12	2.5	M4	
7	30	25	6	12	2.5	M4	
8	35	30	6	12	2.5	M4	
9	40	35	6	12	2.5	M4	
10	45	40	6	12	2.5	M4	

MOQ:1pcs for each size

Screw #16 For 5mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	18.8	14	5	7	2.4	M4	
2	20.8	16	5	7	2.4	M4	
3	21.8	17	5	7	2.4	M4	
4	24.8	20	5	7	2.4	M4	
5	13.8	9	5	7	2.4	M4	
6	16.8	12	5	7	2.4	M4	
7	29.8	25	5	7	2.4	M4	
8	34.8	30	5	7	2.4	M4	
9	39.8	35	5	7	2.4	M4	
10	44.8	40	5	7	2.4	M4	

MOQ:1pcs for each size

Screw #17 For 6mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	18.8	14	6	7	2.4	M4	
2	20.8	16	6	7	2.4	M4	
3	21.8	17	6	7	2.4	M4	
4	24.8	20	6	7	2.4	M4	
5	13.8	9	6	7	2.4	M4	
6	16.8	12	6	7	2.4	M4	
7	29.8	25	6	7	2.4	M4	
8	34.8	30	6	7	2.4	M4	
9	39.8	35	6	7	2.4	M4	
10	44.8	40	6	7	2.4	M4	

MOQ:1pcs for each size

Screw #18 For 5mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	18.4	14	5	10	1.2	M4	
2	20.4	16	5	10	1.2	M4	
3	21.4	17	5	10	1.2	M4	
4	24.4	20	5	10	1.2	M4	
5	13.4	9	5	10	1.2	M4	
6	16.4	12	5	10	1.2	M4	
7	27.4	25	5	10	1.2	M4	
8	32.4	30	5	10	1.2	M4	
9	37.4	35	5	10	1.2	M4	
10	42.4	40	5	10	1.2	M4	

MOQ:1pcs for each size

Screw #19 For 6mm handle hole use

416 stainless steel



No.	Total length (mm)	Screw length (mm)	Screw diameter (mm)	Countersunk diameter (mm)	Countersunk thickness (mm)	Thread	
1	18.4	14	5	10	1.2	M4	
2	20.4	16	5	10	1.2	M4	
3	21.4	17	5	10	1.2	M4	
4	24.4	20	5	10	1.2	M4	
5	13.4	9	5	10	1.2	M4	
6	16.4	12	5	10	1.2	M4	
7	27.4	25	5	10	1.2	M4	
8	32.4	30	5	10	1.2	M4	
9	37.4	35	5	10	1.2	M4	
10	42.4	40	5	10	1.2	M4	

MOQ:1pcs for each size

Bearing #1



Bearing frame material	Bearing frame Thickness(mm)	Outer diameter (mm)	Inner diameter (mm)	Ceramic ball diameter (mm)	Number of ceramic balls
H61 brass	1	13.7	6.1	1.588	19

Bearing #2



For	Outer diameter (mm)	Inner diameter (mm)	Ceramic ball diameter (mm)
9103/9102	11.8	6.1	1.588

For	Outer diameter (mm)	Inner diameter (mm)	Ceramic ball diameter (mm)
901/902	10	5.1	1.588

Bearing #3



For	Outer diameter (mm)	Inner diameter (mm)	Stainless steel ball diameter (mm)	
ZT 0405/0808/0456/0900/0804 0055/0460/0462/0920/0909/0392	9.7	5.3	1.588	

Bearing #4



For	Outer diameter (mm)	Inner diameter (mm)	Stainless steel ball diameter (mm)	
CKF	12.7	6.1	1.588	

Bearing #5



Frame	Outer diameter (mm)	Inner diameter (mm)	Ceramics ball diameter (mm)	
Nylon fiberglass	13.5	6.1	1.588	

Bearing #6



Frame	Outer diameter (mm)	Inner diameter (mm)	Ceramics ball diameter (mm)	
Plastic	11.8	6.1	1.588	

Frame	Outer diameter (mm)	Inner diameter (mm)	Ceramics ball diameter (mm)	
Plastic	10	5.1	1.588	

Bearing #7



Frame	Outer diameter (mm)	Inner diameter (mm)	Ceramics ball diameter (mm)	
H61 brass	13.7	6.1	1.588	

Bearing #8



Frame	Outer diameter (mm)	Inner diameter (mm)	Ceramics ball diameter (mm)	
H61 brass	9.7	5.3	1.588	

Bearing #9



Frame	Outer diameter (mm)	Inner diameter (mm)	Stainless steel ball diameter (mm)	
H61 brass	10.5	6.4	1.588	

Frame	Outer diameter (mm)	Inner diameter (mm)	Stainless steel ball diameter (mm)	
H61 brass	9.6	5.2	1.588	

Bearing #10



Frame	Outer diameter (mm)	Inner diameter (mm)	Ceramics ball diameter (mm)	
H61 brass	13.7	6.1	1.588	

Bearing #11



For	Outer diameter (mm)	Inner diameter (mm)	Ceramics ball diameter (mm)	
ZT 0562/0801/0560/0452/0095	12.6	5.1	2.381	

Bearing #12




For	Outer diameter (mm)	Inner diameter (mm)	Ceramics ball diameter (mm)	
C156	11	5.6	1.588	

Bearing #13



For	Outer diameter (mm)	Inner diameter (mm)	Stainless steel ball diameter (mm)	
ZT0562/0801/0560/0452/0095 Blue nylon Fiberglass bracket	12.6	5.1	2.381	

Bearing #13

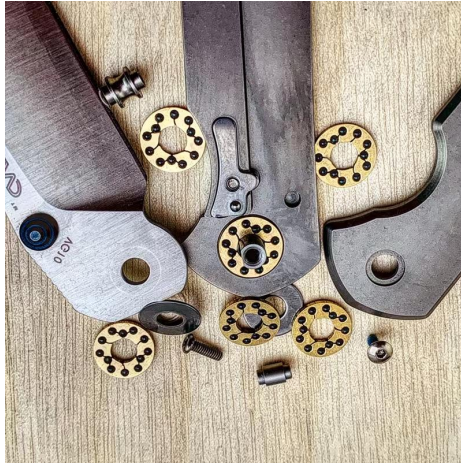

Outer diameter (mm)	Inner diameter (mm)	Stainless steel ball diameter (mm)	
12	5.1	1.588	

Nitride Silicon Ceramic Bearing Ball



Example price:

1mm - 4mm -

There are many diameters to choose from. Please let us know your specific requirements so that we can quote.

Washer



Material:H62 brass

No.	Outer diameter (mm)	Inner diameter (mm)	Thick (mm)		Remark
1	8	4	0.2		For folding knife
2	10	5	0.2		For folding knife
3	10	6	0.2		For folding knife
4	10	5.1	0.6		For folding knife
5	12	5.1	0.6		For folding knife
6	12	6.2	0.4		For folding knife
7	12.7	6.4	0.4		For Rich Hinderer XM18 and XM24,both 3 inch or 3.5 inch
8	11	4.5	0.5		For Spyderco C158
9	11	5.6	0.5		For Spyderco C186
10	8	4	0.2		For Spyderco C11,C10
11	11	5.1	0.3		For Spyderco C81,C223,C85
12	15.5	5.7	0.7		For 710,720,723,551
13	16	6.5	0.8		For Emerson CQC-7
14	11	5	0.8		For Benchmade 940 Osborne Knives
15	9	5	0.4		For Benchmade Bugout AXIS Lock Knife
16	14	6.2	0.3		For Recon1
17	14	6.5	0.6		For Adamas 273
18	11	5.1	0.5		For ColdSteel 26SP
19	14	6.2	0.3		For Voyager

Corby bolts

	No.	Head Diameter	Head Length	Shank Diameter	Shank Length	Overall Length (min)	Overall Length (max)	Thread	Driver	Material
1	1.1	0.156	0.25	0.119	0.34	0.9	1.1	US 2-56	Hex(0.078)	Aluminum
	1.2	0.156	0.25	0.119	0.34	0.9	1.1	US 2-56	Hex(0.078)	Brass
	1.3	0.156	0.25	0.119	0.34	0.9	1.1	US 2-56	Hex(0.078)	stainless steel
	1.4	0.156	0.25	0.119	0.34	0.9	1.1	US 2-56	Hex(0.078)	copper
2	2.1	0.187	0.25	0.119	0.34	0.9	1.1	US 2-56	Hex(0.078)	Aluminum
	2.2	0.187	0.25	0.119	0.34	0.9	1.1	US 2-56	Hex(0.078)	Brass
	2.3	0.187	0.25	0.119	0.34	0.9	1.1	US 2-56	Hex(0.078)	stainless steel
	2.4	0.187	0.25	0.119	0.34	0.9	1.1	US 2-56	Hex(0.078)	copper
3	3.1	0.25	0.3	0.187	0.35	1	1.2	US 6-40	Slot	Aluminum
	3.2	0.25	0.3	0.187	0.35	1	1.2	US 6-40	Slot	Brass
	3.3	0.25	0.3	0.187	0.35	1	1.2	US 6-40	Slot	stainless steel
	3.4	0.25	0.3	0.187	0.35	1	1.2	US 6-40	Slot	copper
4	4.1	0.312	0.3	0.187	0.35	1.09	1.32	US 8-32	Slot	Aluminum
	4.2	0.312	0.3	0.187	0.35	1.09	1.32	US 8-32	Slot	Brass
	4.3	0.312	0.3	0.187	0.35	1.09	1.32	US 8-32	Slot	stainless steel
	4.4	0.312	0.3	0.187	0.35	1.09	1.32	US 8-32	Slot	copper
5	5.1	0.312	0.3	0.187	0.35	1.25	1.4	US 8-32	Slot	Aluminum
	5.2	0.312	0.3	0.187	0.35	1.25	1.4	US 8-32	Slot	Brass
	5.3	0.312	0.3	0.187	0.35	1.25	1.4	US 8-32	Slot	stainless steel
	5.4	0.312	0.3	0.187	0.35	1.25	1.4	US 8-32	Slot	copper
6	6.1	0.312	0.32	0.218	0.315	0.96	1.15	US 8-33	Slot	Aluminum
	6.2	0.312	0.32	0.218	0.315	0.96	1.15	US 8-33	Slot	Brass
	6.3	0.312	0.32	0.218	0.315	0.96	1.15	US 8-33	Slot	stainless steel
	6.4	0.312	0.32	0.218	0.315	0.96	1.15	US 8-33	Slot	copper
7	7.1	0.312	0.32	0.25	0.315	0.96	1.15	US 8-32	Slot	Aluminum
	7.2	0.312	0.32	0.25	0.315	0.96	1.15	US 8-32	Slot	Brass
	7.3	0.312	0.32	0.25	0.315	0.96	1.15	US 8-32	Slot	stainless steel
	7.4	0.312	0.32	0.25	0.315	0.96	1.15	US 8-32	Slot	stainless steel




Mosaic Pins



Length:39cm or customized

Diameter:2/3/4/5/6/8/9/10/12mm

Clips 2.2 & 3.3

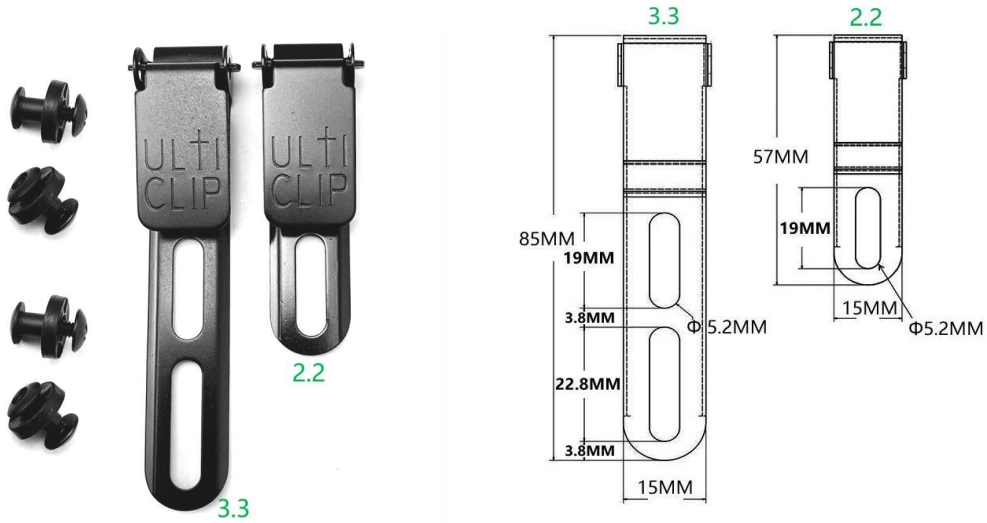

Clip-2.2

Slim Design 2.2, single hole

Size : 2.2 inches x 0.6 inches

Mounting Hole: 0.75 inches x 0.2 inches

Two sets of screws & 2 washers included.

Moq: 10 pcs

Clip-3.3

Slim Design 3.3, double Hole

Size : 3.3 inches x 0.6 inches

Mounting Hole: 0.75 inches x 0.2 inches

Two sets of screws & 2 washers included.

Moq: 10 pcs

Clips #1 to #11

1. All the following clips are made from 420 stainless steel
2. Price includes 3 screws
3. Moq=1 pc



Kydex Tek Lok

1. Moq:1 pc
2. Price is for 1 set, which includes 1 Kydex Sheath Holster, 2 nuts, 2 screws and 2 washers.




Leatherman Raptor Shears Holster

1.Moq:1 pc



Tactical First Aid bag

- 1.Material:1000D nylon,YKK zipper,ITW hanging buckle
- 2.Color:black and orange
- 3.ncludes hanging buckle and molle strap
- 4.Moq:1 pc

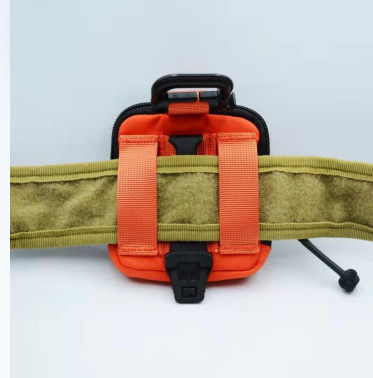

Artificial fish leather



1. Material:PVC
2. Width:1350mm, length can be customized.
3. Moq:5 yard

Bevel Jig-Aluminum alloy




1.Material:Aluminum alloy

2.Size :250×75×60mm,size can be customized

3.Moq: 1set

Bevel Jig-304 Stainless Steel

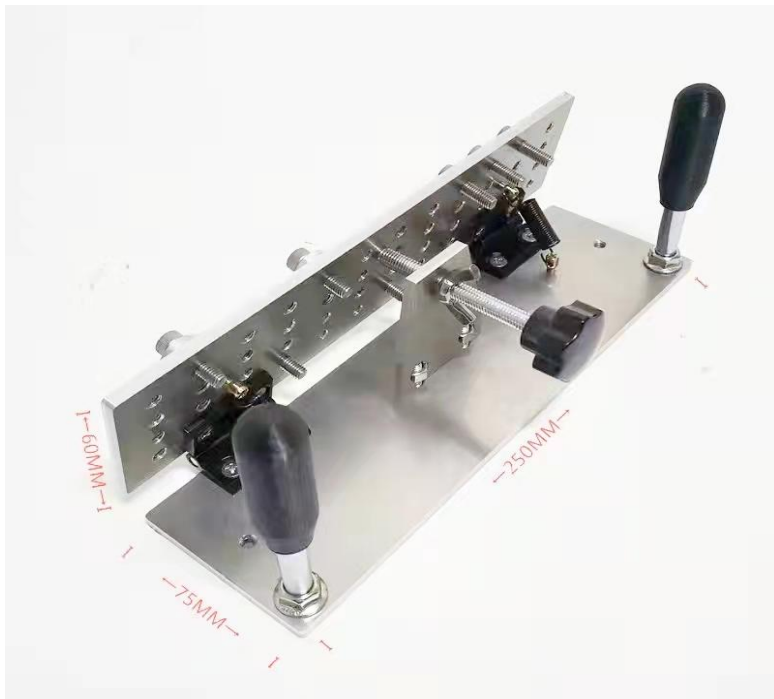

1. Material: 304 stainless steel, can be turned over
2. Size : 250×75×60mm, size can be customized
3. Moq: 1set

Finger Gripper



Material : Nylon

EDC Box 1



The material is abs plus glass fiber.

There are sponges and waterproof strips inside.

There is a place to bind the rope and carry it with you.

There are orange and black colors.

Divided into large and small sizes.

The price of large and small sizes is the same

EDC Box 2



The material is abs.

The colors are blue, black and yellow.

There are large and small sizes.The price is the same.

EDC Box 3



The material is composite material.

There are three types: large, medium and small.

Colors are black,orange and desert.

Size 1:The external dimension of the medium size is $335 \times 132 \times 70$ mm, and the internal dimension is $320 \times 120 \times 70$ mm.

Size 2: The external dimension of the large size is 210×125 mm, and the internal dimension is 193×113 mm.

Size 3: The external dimension of the medium size 165×105 mm and the internal dimension of 155×95 mm.

Size 4: The external dimension of the small size is 130×75 mm and the internal dimension is 118×68 mm.

EDC Box 4



Materials: Plastic

Two colors are available; Black/Green

Silicone sealing strip, PE shockproof lining

Size A:The external dimension is $132 \times 90 \times 37$ mm,

Size B:The external dimension is $143 \times 47 \times 41$ mm,

Size C:The external dimension is $184 \times 122 \times 48$ mm,

Size D:The external dimension is $202 \times 121 \times 70$ mm,

Size E:The external dimension is $263 \times 123 \times 70$ mm

Size F:The external dimension is $335 \times 132 \times 70$ mm

Resin Luminous Board

To achieve the luminous effect, sheets need to be placed in a dark place after irradiating it with a flashlight or a lamp tube or too much vision for dozens of seconds to have the luminous effect.



Fixed size 500*500*10mm

Color:Green or Blue



The sheet color you will see during the daytime

Standard colors are green and blue.



The sheet color you will see at night after lighting

The first picture on the left is the color that the customer sees when receiving the goods, and the second picture is the color of the board in the dark after being irradiated by light

Camping Lights



1800mAh battery
2600mAh battery



DOUBLE LIGHT CAMPING HW-777

Camping/Exploration/Maintenance/Power Outage

USB fast direct charge

Rotatable metal hook

Red light flashing

